


Upgrade Firmware


1. Please Prepare USB 2.0 Flash Memory Driver disk.




2. Please selection the suitable firmware according to your lcd panel (Resolution).

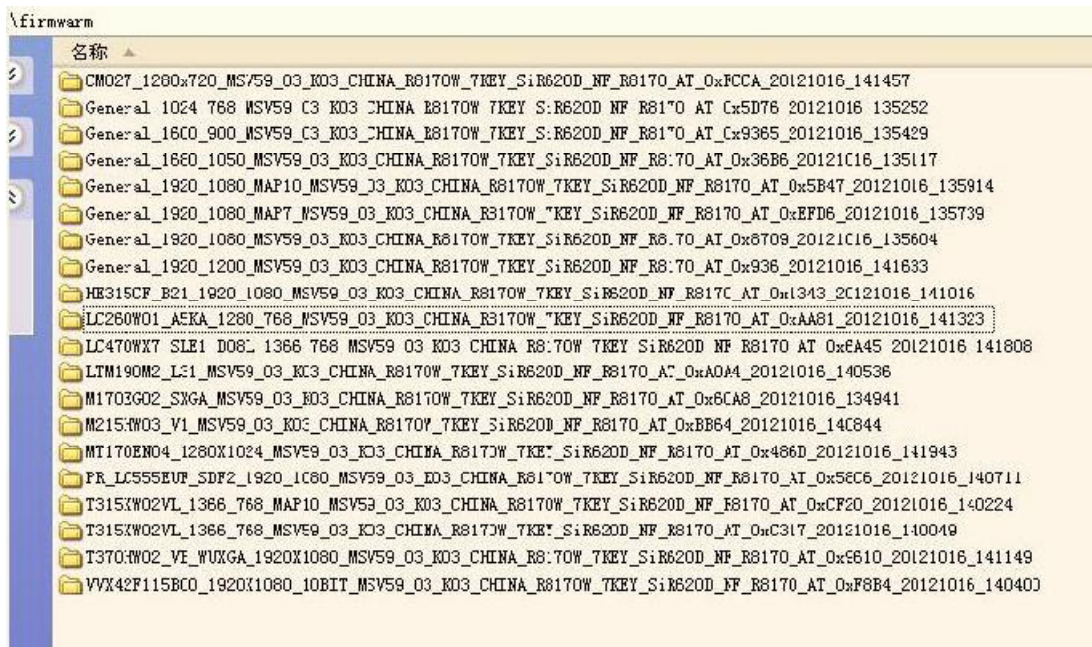

3. Please copy the firmware to the USB 2.0 Flash Memory Driver disk. Make sure it only have one firmware file that you need refresh.

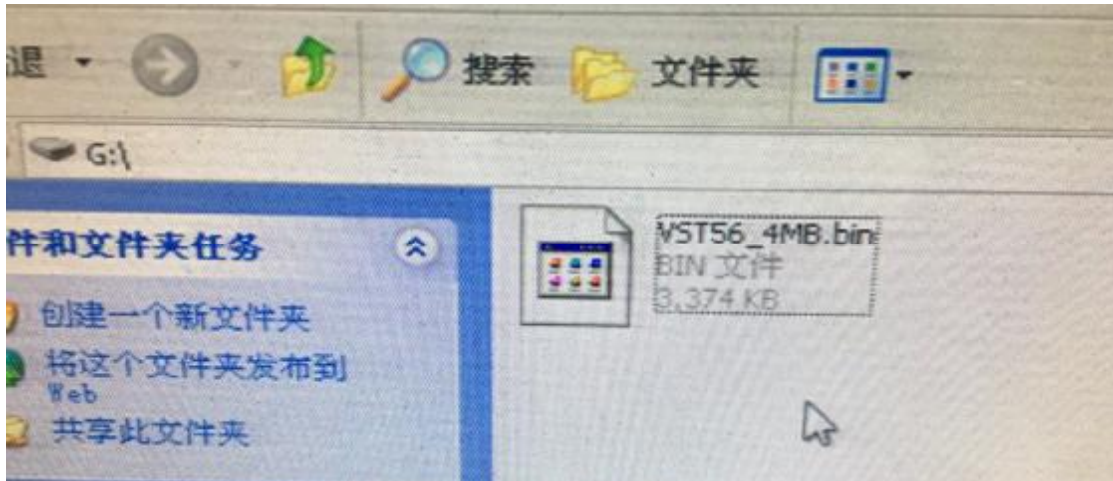

4. Plug in USB 2.0 Flash Memory Driver disk to the controller Board.

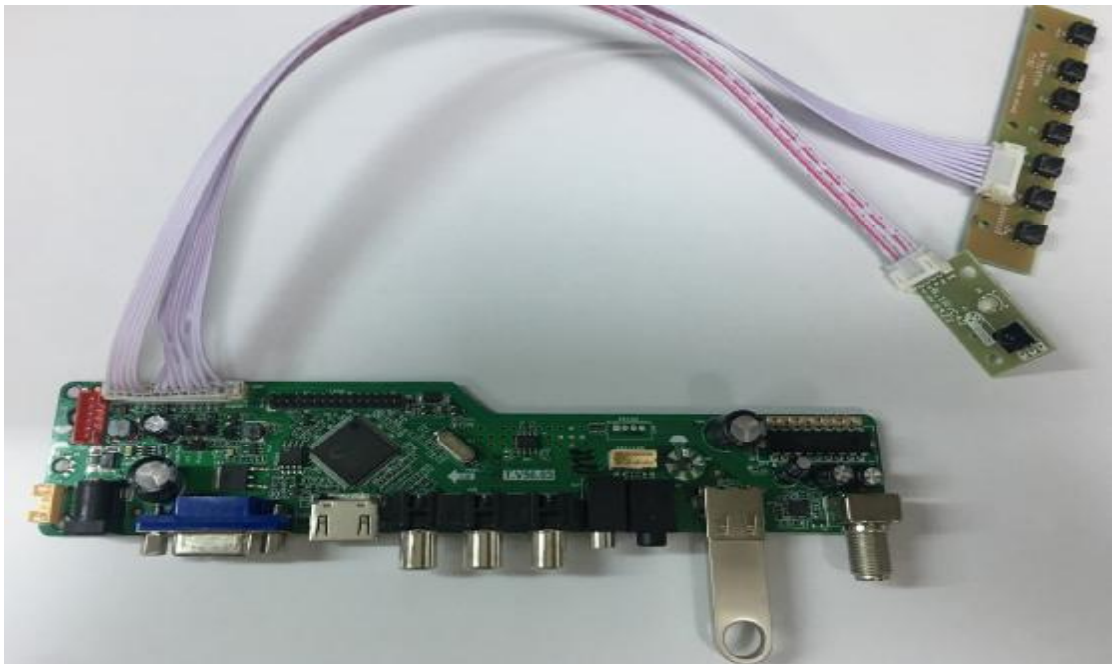

5. Plug in 12V Power Supply:



6. Wait a moment. After starting the upgrade it flickers from red to green and back slowly. After a few seconds it starts to flicker more rapidly. This means upgrade finished.



7. Restart the power supply. Turn on the power by keyboard or Remote control.



8. Then you will see the controller board can work with the LCD panel. If the LCD panel displays the image as below. It need change the LVDS map.



9. Change LVDS Map/Panel ID:

Enter Factory Menu. Press “menu” “1” “1” “4” “7” via

Remote Controller

Display below image:





10. If you need change language, please press menu selection below options.

